



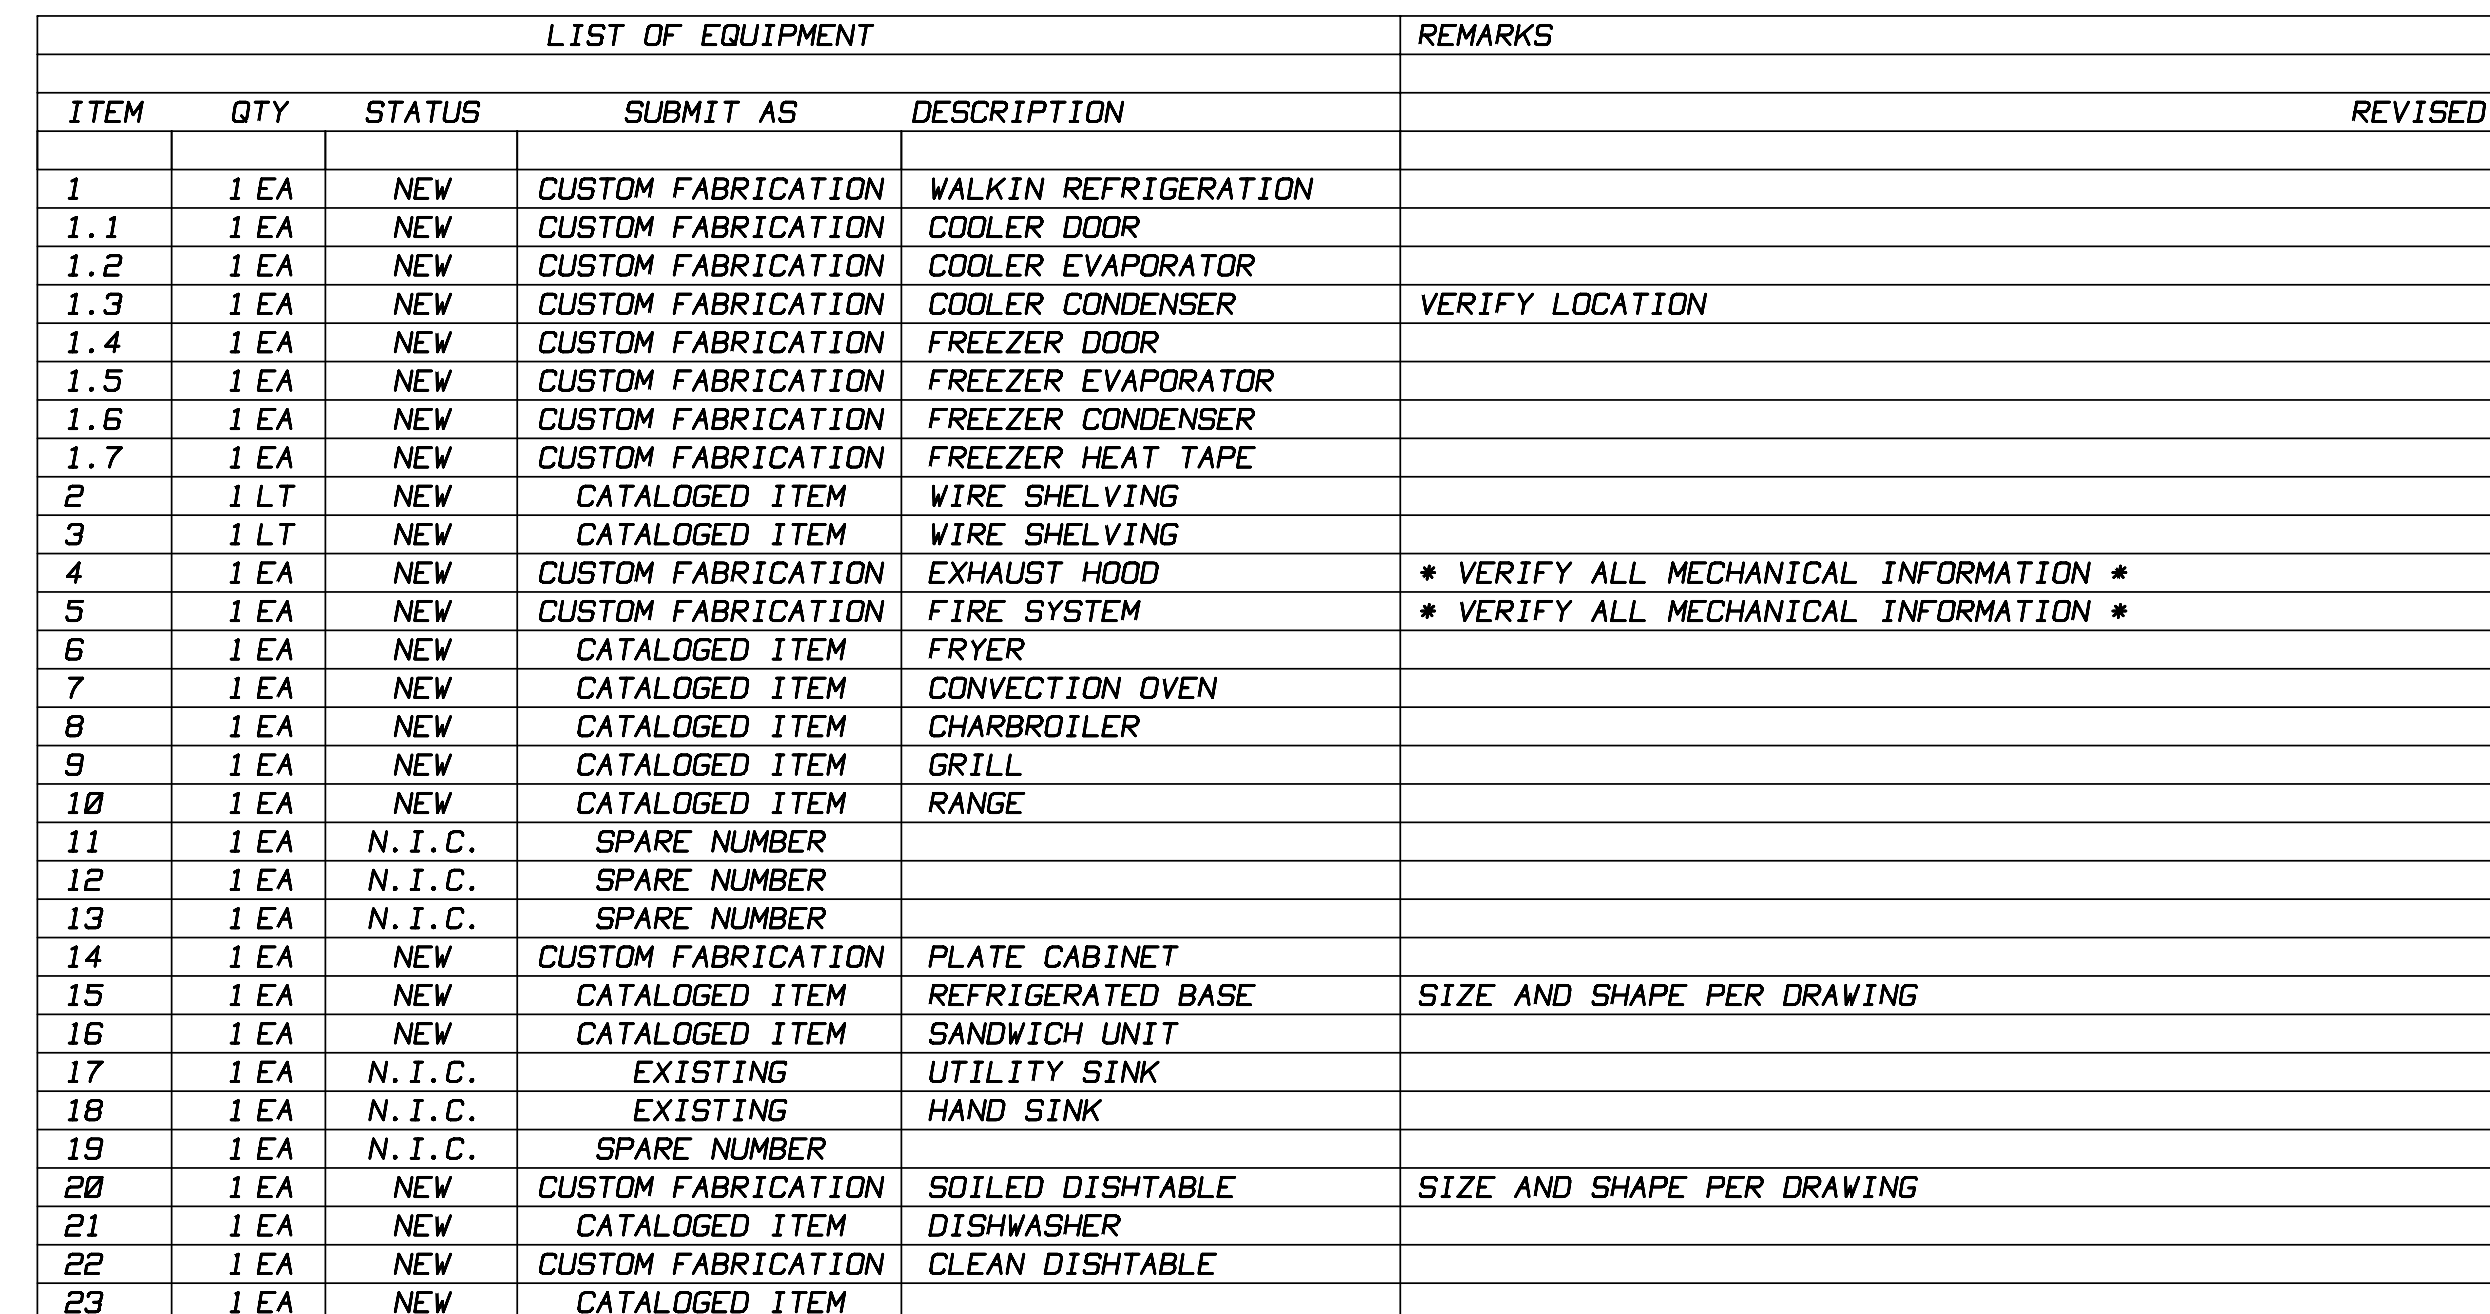

1. THE OWNER IS RESPONSIBLE FOR SUBMITTING PLANS AND SUPPORTING DATA TO GOVERNING BODIES FOR APPROVAL UNLESS OTHERWISE AGREED IN WRITING.
2. TRADES ARE RESPONSIBLE FOR VERIFYING THAT THEY ARE WORKING WITH THE LATEST PLAN BEFORE COMMENCING WORK.
3. THESE PLANS ARE TO BE USED IN CONJUNCTION WITH ARCHITECTURAL/ENGINEERING PLANS AND ANY CONFLICTS MUST BE CLARIFIED BEFORE PROCEEDING WITH WORK. NOTHING IN THESE PLANS IS INTENDED TO CONFLICT WITH GOVERNING CODES AND ANY CONFLICTS MUST BE RESOLVED BEFORE PROCEEDING.
4. ROUGHING IN DIMENSIONS SHOWN ARE FROM FINISHED FLOORS WALLS OR COLUMNS TO THE RECOMMENDED LOCATION WHERE THE STUB UP SHOULD TERMINATE THRU WALL OR FLOOR SO IT CAN BE BRANCHED TO THE CONNECTION POINT ON FIXTURE AT TIME OF FINAL CONNECTION BY OTHER TRADES.
5. ELECTRICAL CHARACTERISTICS ARE 120/208 V 3 Ø AS VERIFIED BY _____
6. ELECTRICAL CONTRACTOR NOTE
 - A. CONTRACTORS, DISCONNECTS AND/OR STARTERS ARE NOT SUPPLIED BY FOOD SERVICE CONTRACTOR.
 - B. ITEMS THAT MAY BE PART OF THIS CONTRACT MAY REQUIRE CONTROL OR INTERCONNECTING WIRING. THEY MAY INCLUDE
 1. FIRE PROTECTION SYSTEM
 2. EXHAUST SYSTEM
 3. FLOOD LIGHTS
 4. REFRIGERATION COMPONENTS
 - C. FURNISH AND INSTALL CORDS AND PLUGS ON ANYTHING MORE THAN 120V-20AMP. IT IS RECOMMENDED THAT ELECTRIC CONDUITS IN FLOOR BE STUDDOED UP 3" ABOVE FINISHED FLOOR AND TERMINATED IN SUCH A MANNER THAT ADDITIONAL CONDUIT AND/OR JUNCTION BOX MAY BE MOUNTED AFTER EQUIPMENT IS IN PLACE. OTHER REFERENCE TO HEIGHT ON DRAWING INDICATES DISTANCE TO CENTER LINE OF BOX.
7. PLUMBING MECHANICAL CONTRACTING NOTE
 - A. WATER FLOW PRESSURE AT DISHWASHING MACHINE CONNECTION NOT TO EXCEED 25 P.S.I. NOR LESS 20 P.S.I.
 - B. STEAM PRESSURE NOT TO EXCEED 25 P.S.I. ON ANY FOOD EQUIPMENT, UNLESS OTHERWISE NOTED.
 - C. SUPPLY SERVICE RATED SHUT OFF VALVES ON ALL WATER AND GAS LINES.
 - D. SUPPLY 140° HOT WATER TO ALL MECHANICAL DISHWASHERS OR BOOSTERS HEATERS AS REQUIRED.
 - E. UNLESS OTHERWISE SPECIFIED PROVIDE FLEXIBLE LINES ON ALL GAS EQUIPMENT.
 - F. ITEMS THAT ARE PART OF THIS CONTRACT MAY REQUIRE INTERCONNECTING PIPING. THE MAY INCLUDE:
 1. DISHWASHER AND BOOSTER HEATERS
 2. DISPOSERS
 - G. ITEMS REQUIRING INDIRECT WASTE WILL BE PIPED BY PLUMBING CONTRACTOR.
 - H. UNLESS OTHERWISE SPECIFIED, SHUT OFF VALVES REQUIRED FOR FIRE PROTECTION SYSTEMS WILL BE PROVIDED AND INSTALLED BY PLUMBING CONTRACTOR.
 - I. PROVIDE GAS PRESSURE REGULATORS FOR SYSTEM PRESURES GREATER THAN 0.5 PSIG

[illegible]
$$I \setminus 4'' = I' - O''$$

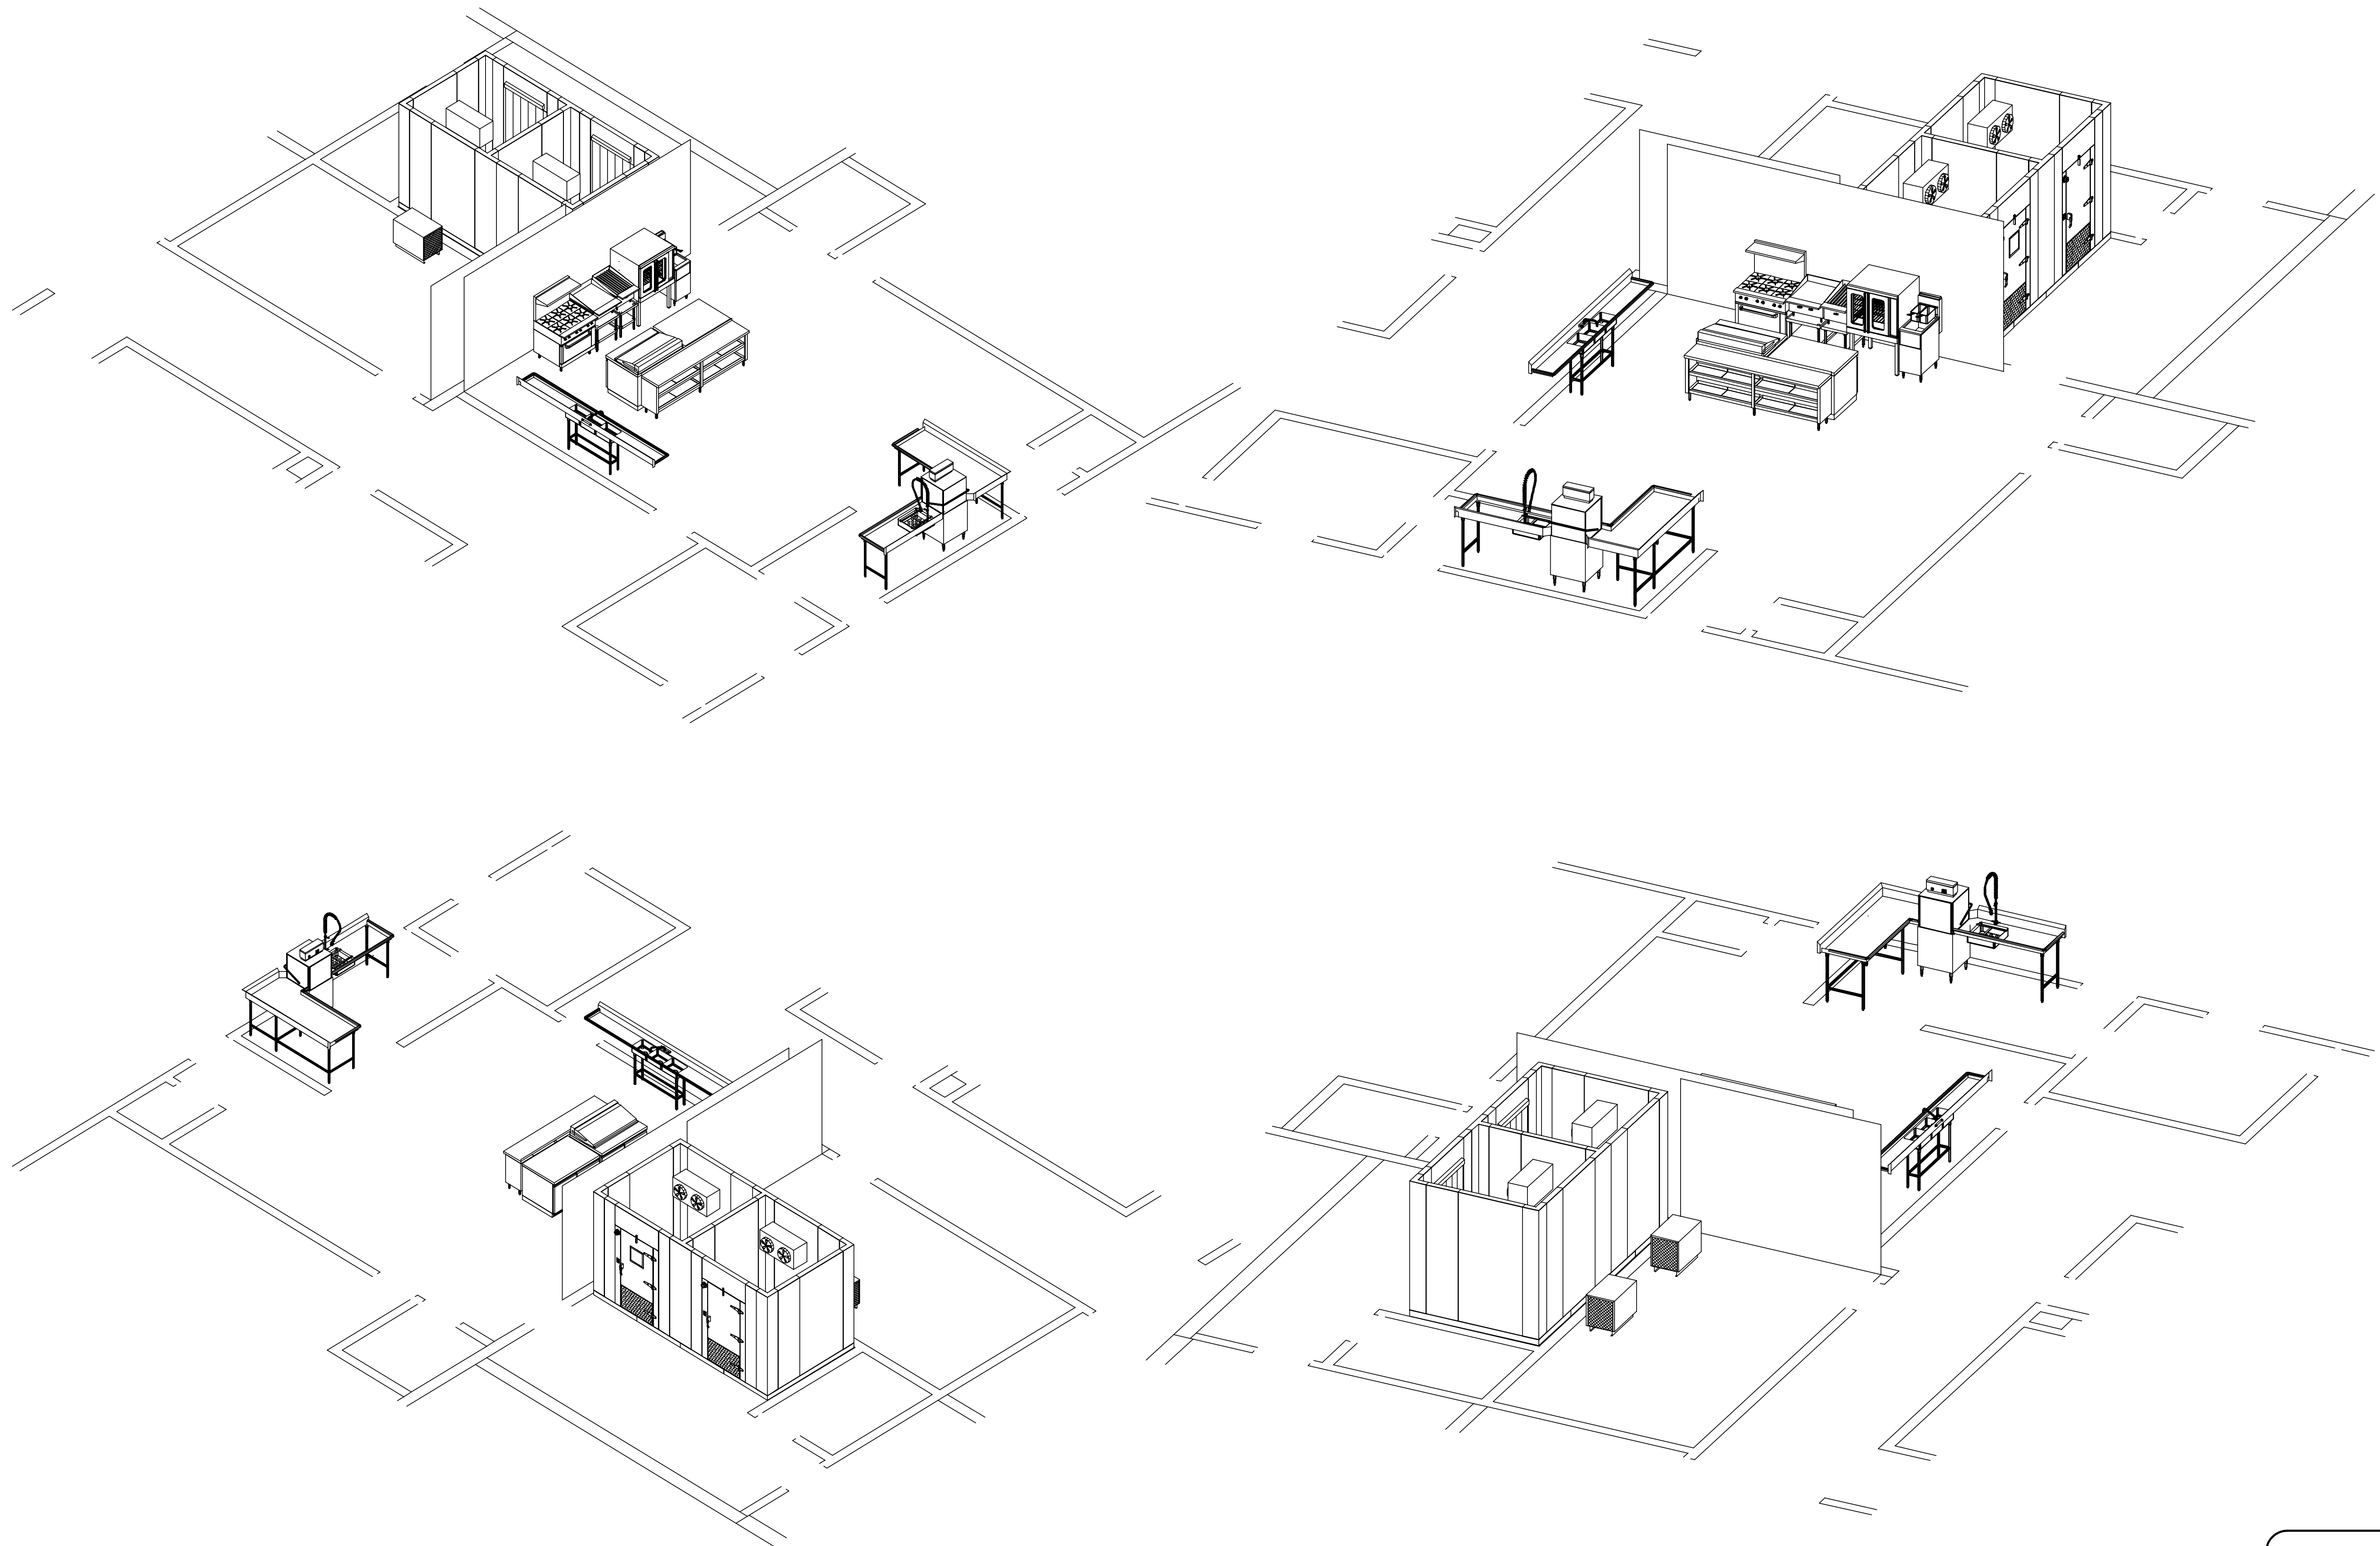

CONTENTS	
K1	LAYOUT
K2	ISOMETRICS
K3	SCHEDULES
K4	ELECTRICAL
K5	PLUMBING
K6	VENTILATION
K7	MECHANICAL

99 WALKER STREET
KITCHEN

REVISIONS			
No.	Date	By	Revision
01	06/17/2021	SE WALKER/ETTRBBB	schedules

LIST OF EQUIPMENT					ELECTRICAL					PLUMBING					GAS INPUT	REMARKS	
ITEM	QTY	STATUS	SUBMIT AS	DESCRIPTION	REQUIREMENTS PER UNIT					WATER		WASTE			PER UNIT		
					VOLT	PH	AMP	HP	NOTES	COLD	HOT	DIRECT	INDIRECT	NOTES	BTU	REVISED	ITEM
1	1 EA	NEW	CUSTOM FABRICATION	WALKIN REFRIGERATION													1
1.1	1 EA	NEW	CUSTOM FABRICATION	COOLER DOOR	120	1	10.0		1.1E								1.1
1.2	1 EA	NEW	CUSTOM FABRICATION	COOLER EVAPORATOR	120	1	4.2		1.2E								1.2
1.3	1 EA	NEW	CUSTOM FABRICATION	COOLER CONDENSER	200	1	11.0	3/4	1.3E			3/4"					1.3
1.4	1 EA	NEW	CUSTOM FABRICATION	FREEZER DOOR	120	1	10.0		1.4E								1.4
1.5	1 EA	NEW	CUSTOM FABRICATION	FREEZER EVAPORATOR	200	1	8.7		1.5E			3/4"	1.5P				1.5
1.6	1 EA	NEW	CUSTOM FABRICATION	FREEZER CONDENSER	200	1	26.0	2	1.6E								1.6
1.7	1 EA	NEW	CUSTOM FABRICATION	FREEZER HEAT TAPE	120	1	10.0		1.7E								1.7
2	1 LT	NEW	CATALOGED ITEM	WIRE SHELVING													2
3	1 LT	NEW	CATALOGED ITEM	WIRE SHELVING													3
4	1 EA	NEW	CUSTOM FABRICATION	EXHAUST HOOD	120	1	6.0		4E							* VERIFY ALL MECHANICAL INFORMATION *	4
5	1 EA	NEW	CUSTOM FABRICATION	FIRE SYSTEM	120	1	10.0		5E							* VERIFY ALL MECHANICAL INFORMATION *	5
6	1 EA	NEW	CATALOGED ITEM	FRYER											90,000		6
7	1 EA	NEW	CATALOGED ITEM	CONVECTION OVEN	120	1	9.0		7E						70,000		7
8	1 EA	NEW	CATALOGED ITEM	CHARBROILER											45,000		8
9	1 EA	NEW	CATALOGED ITEM	GRILL	120	1	2.0		9E						56,000		9
10	1 EA	NEW	CATALOGED ITEM	RANGE											190,000		10
11	1 EA	N.I.C.	SPARE NUMBER														11
12	1 EA	N.I.C.	SPARE NUMBER														12
13	1 EA	N.I.C.	SPARE NUMBER														13
14	1 EA	NEW	CUSTOM FABRICATION	PLATE CABINET													14
15	1 EA	NEW	CATALOGED ITEM	REFRIGERATED BASE	120	1	2.5		15E							SIZE AND SHAPE PER DRAWING	15
16	1 EA	NEW	CATALOGED ITEM	SANDWICH UNIT	120	1	4.5		16E								16
17	1 EA	N.I.C.	EXISTING	UTILITY SINK						1/2"	1/2"	(3)2"		17P			17
18	1 EA	N.I.C.	EXISTING	HAND SINK						1/2"	1/2"	1-1/2"		18P			18
19	1 EA	N.I.C.	SPARE NUMBER														19
20	1 EA	NEW	CUSTOM FABRICATION	SOILED DISHTABLE						1/2"	1/2"		2"	20P		SIZE AND SHAPE PER DRAWING	20
21	1 EA	NEW	CATALOGED ITEM	DISHWASHER	120	1	14.0		21E			3/4"					21
22	1 EA	NEW	CUSTOM FABRICATION	CLEAN DISHTABLE													22
23	1 EA	NEW	CATALOGED ITEM														23

ELECTRICAL NOTES:

1.1E, RI FROM ABOVE, CP 70" AFF, INTERCONNECT LIGHTS
1.2E, RI FROM ABOVE, CP 70" AFF, INTERCONNECT SOLENOID AND TSTAT
1.3E, VERIFY LOCATION,
1.4E, RI FROM ABOVE, INTERCONNECT LIGHTS, DOOR HEATER, AND VENT PORT
1.5E, POWER FROM CONDENSER, RI FROM ABOVE, PROVIDE 5 WIRE, 200 CIRCUIT, FROM DEFROST TIMER, INTERCONNECT SOLENOID AND TSTAT
1.6E, VERIFY LOCATION,
1.7E, NEMA 5-15, RI FROM ABOVE, MOUNT RECP ON EVAPORATOR
4E, LIGHTS ONLY. VERIFY ALL LOCATIONS,
5E, VERIFY ALL LOCATIONS,
7E, NEMA 5-15, RI 10" AFF,
9E, NEMA 5-15, RI 10" AFF,
15E, NEMA 5-15, RI 0" AFF,
16E, NEMA 5-15, RI 0" AFF,
21E, RI 18" AFF, CP 22" AFF,

PLUMBING NOTES:

1.5P, HEAT TAPE REQUIRED
17P, RI WATER 14" AFF, RI WASTE 10" AFF, VERIFY GREASE TRAP REQUIREMENTS
18P, RI WATER 21" AFF, RI WASTE 18" AFF, *VERIFY ALL MECHANICAL REQUIREMENTS*
20P, RI WATER 14" AFF
21, RI WATER 76" AFF

GAS NOTES:

6G GAS - 90 MBTU, 3/4" PIPE, CP 12" AFF, RI 24" AFF, (1)FRYER
7G GAS - 70 MBTU, 3/4" PIPE, CP 30" AFF, RI 24" AFF, (1)CONVECTION OVEN
8G GAS - 45 MBTU, 3/4" PIPE, CP 30" AFF, RI 24" AFF, (1)CHARBROILER
9G GAS - 56 MBTU, 3/4" PIPE, CP 30" AFF, RI 24" AFF, (1)GRILL
10G GAS - 190 MBTU, 3/4" PIPE, CP 32" AFF, RI 24" AFF, (1)RANGE

CONTENTS


K1	LAYOUT
K2	ISOMETRICS
K3	SCHEDULES
K4	ELECTRICAL
K5	PLUMBING
K6	VENTILATION
K7	MECHANICAL


SCALE:
AS NOTED
DATE: 06/17/2021
DRAWN BY: DDB
NS-WLK

K3

99 WALKER STREET

KITCHEN

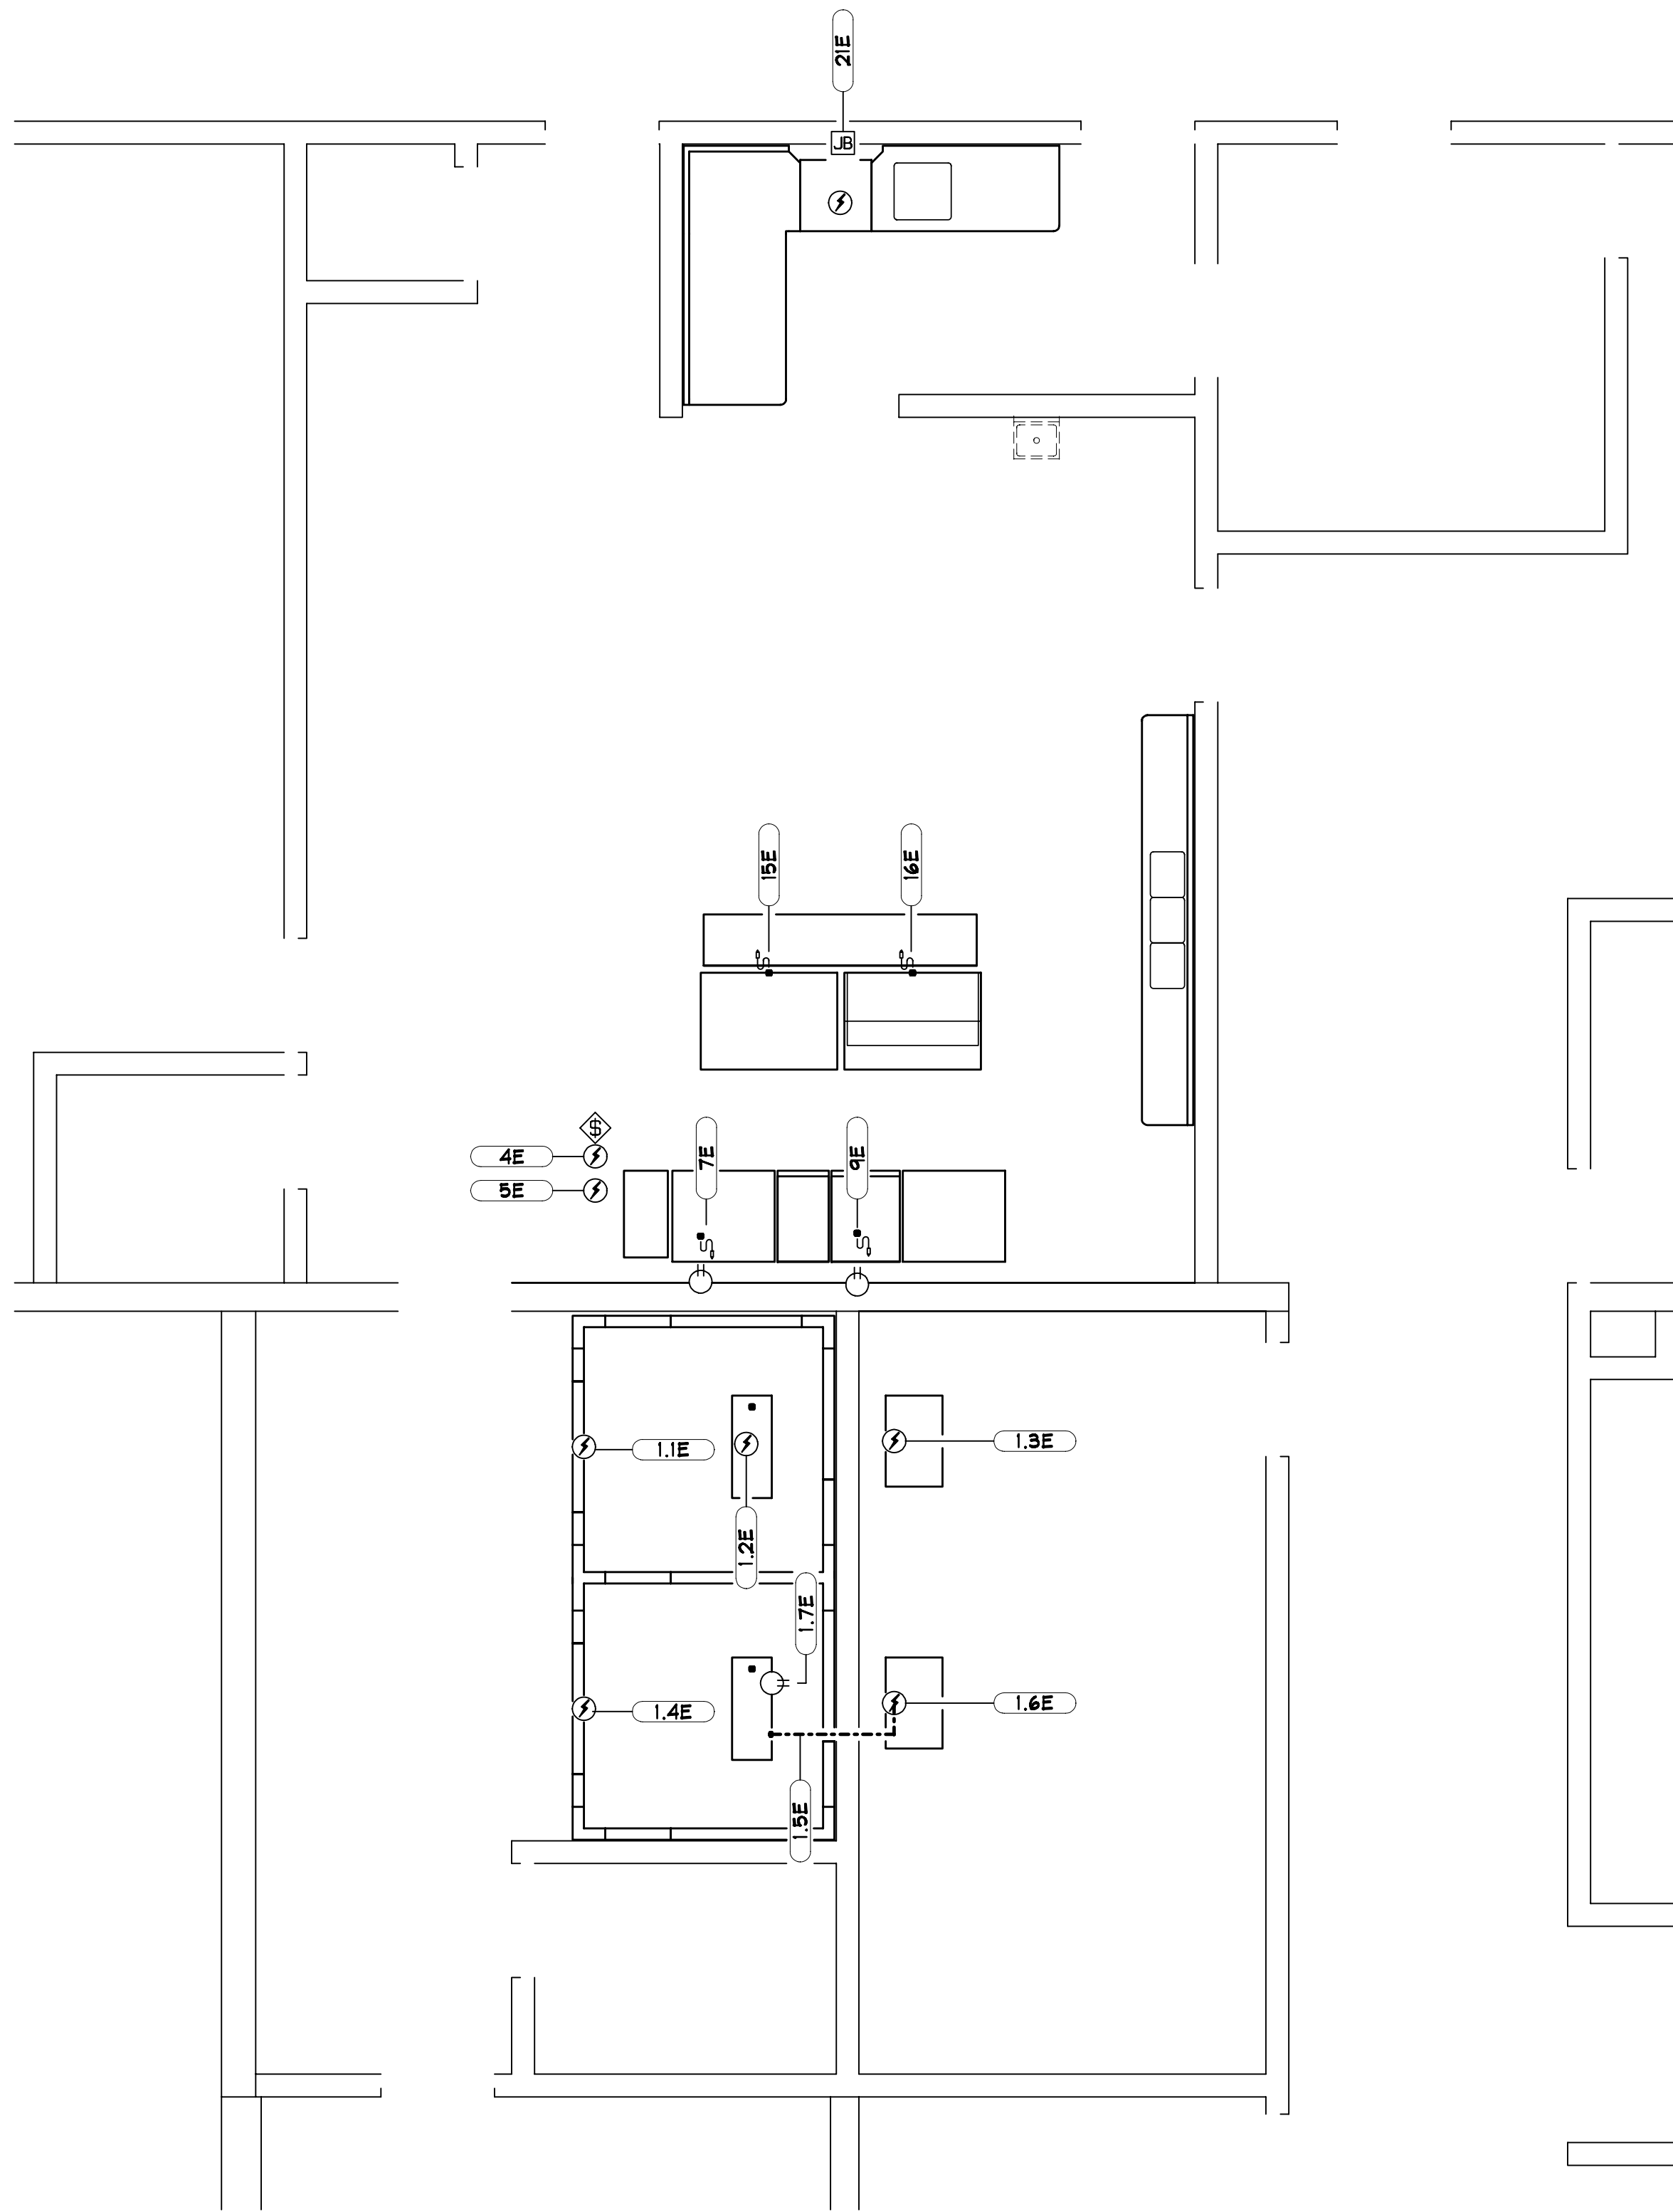

ELECTRICAL SYMBOL SCHEDULE	
FIELD CONNECTIONS BY RESPECTIVE TRADES	
AFF - ABOVE FINISHED FLOOR	KV - KILOWATT
AF - ABOVE FLOOR	HP - HORSE POWER
AFIV - AF IN WALL	PH - PHASE
JBIV - JB IN WALL	SW - SWITCH
JB - JUNCTION BOX	TP - TELEPHONE
LI - LIGHT FIXTURE	DT - DATA TERMINATOR
RI - ROUGH IN	
CP - CONNECTION POINT	

ELECTRICAL

1 \ 4" = 1' - 0"

CONTENTS	
K1	LAYOUT
K2	ISOMETRICS
K3	SCHEDULES
K4	ELECTRICAL
K5	PLUMBING
K6	VENTILATION
K7	MECHANICAL


SCALE: AS NOTED
DATE: 06/17/2021
DRAWN BY: DDB
NS-WLK

K4

OF 7

99 WALKER STREET
KITCHEN

REVISIONS		
No.	Date	By
01	06/18/2025	

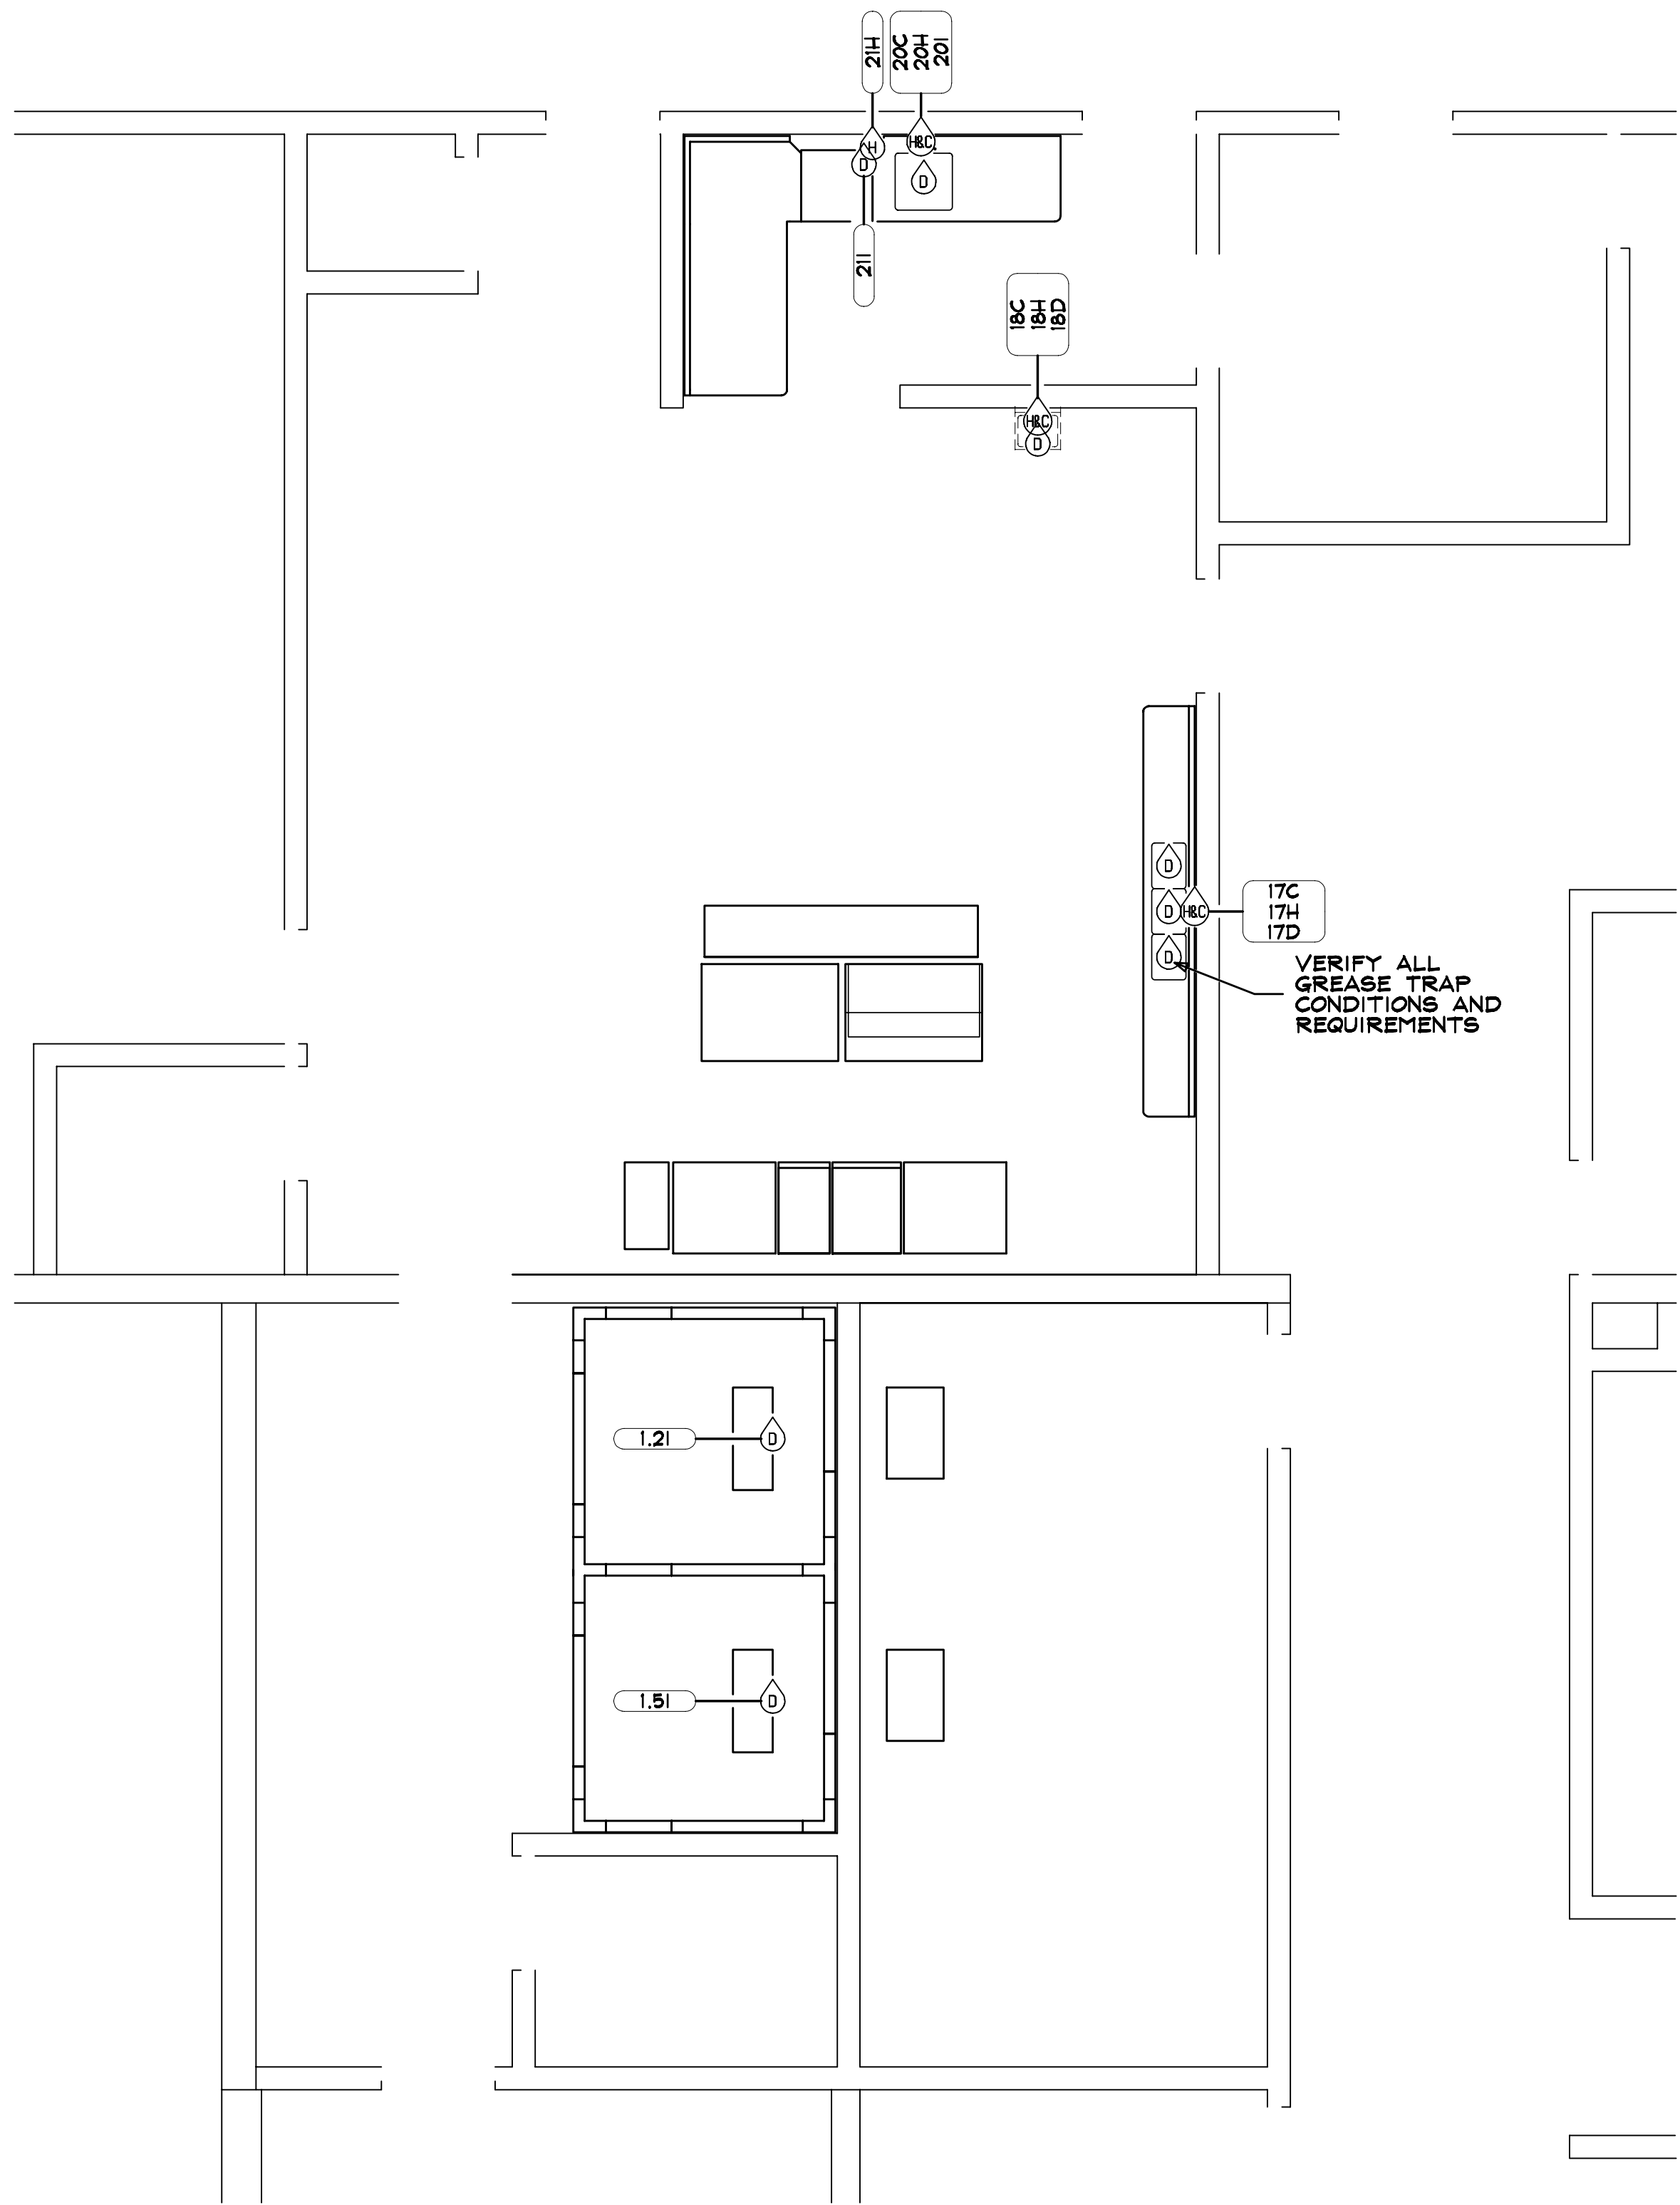

PLUMBING SYMBOL SCHEDULE		
HW -	HOT WATER	
CW -	COLD WATER	
FS -	FLOOR SINK	
FD -	FLOOR DRAIN	
FFD -	FUNNEL FLOOR DRAIN	
DW -	DIRECT WASTE	
OSD -	OPEN SITE DRAIN	
AF -	ABOVE FLOOR	
AFF -	ABOVE FINISHED FLOOR	
RI -	ROUGH IN	
CP -	CONNECTION POINT	
		FIELD CONNECTIONS BY RESPECTIVE TRADES
		C H D
		C.W. H.W. DRAIN
		HC
		HOT & COLD

PLUMBING

1" \ 4" = 1' - 0"

CONTENTS	
K1	LAYOUT
K2	ISOMETRICS
K3	SCHEDULES
K4	ELECTRICAL
K5	PLUMBING
K6	VENTILATION
K7	MECHANICAL

99 WALKER STREET
KITCHEN

REVISIONS			
No.	Date	By	Revision
01	06/17/2021	SE WALKER	schedules

SCALE: AS NOTED


DATE: 06/17/2021

DRAWN BY: DDB

NS-WLK


K5

OF 7

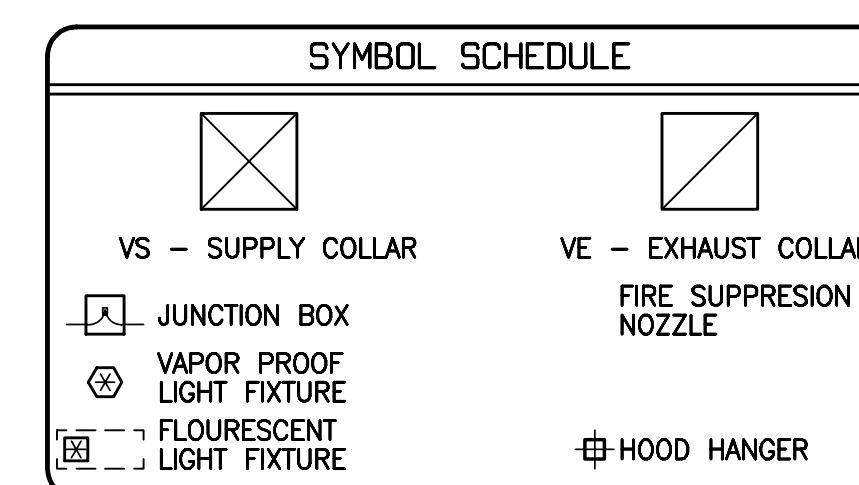
$$I \setminus 4'' = I' - O''$$

SCALE: AS NOTED
DATE: 06/17/2021
DRAWN BY: DDB
NS-WLK

99 WALKER STREET
KITCHEN

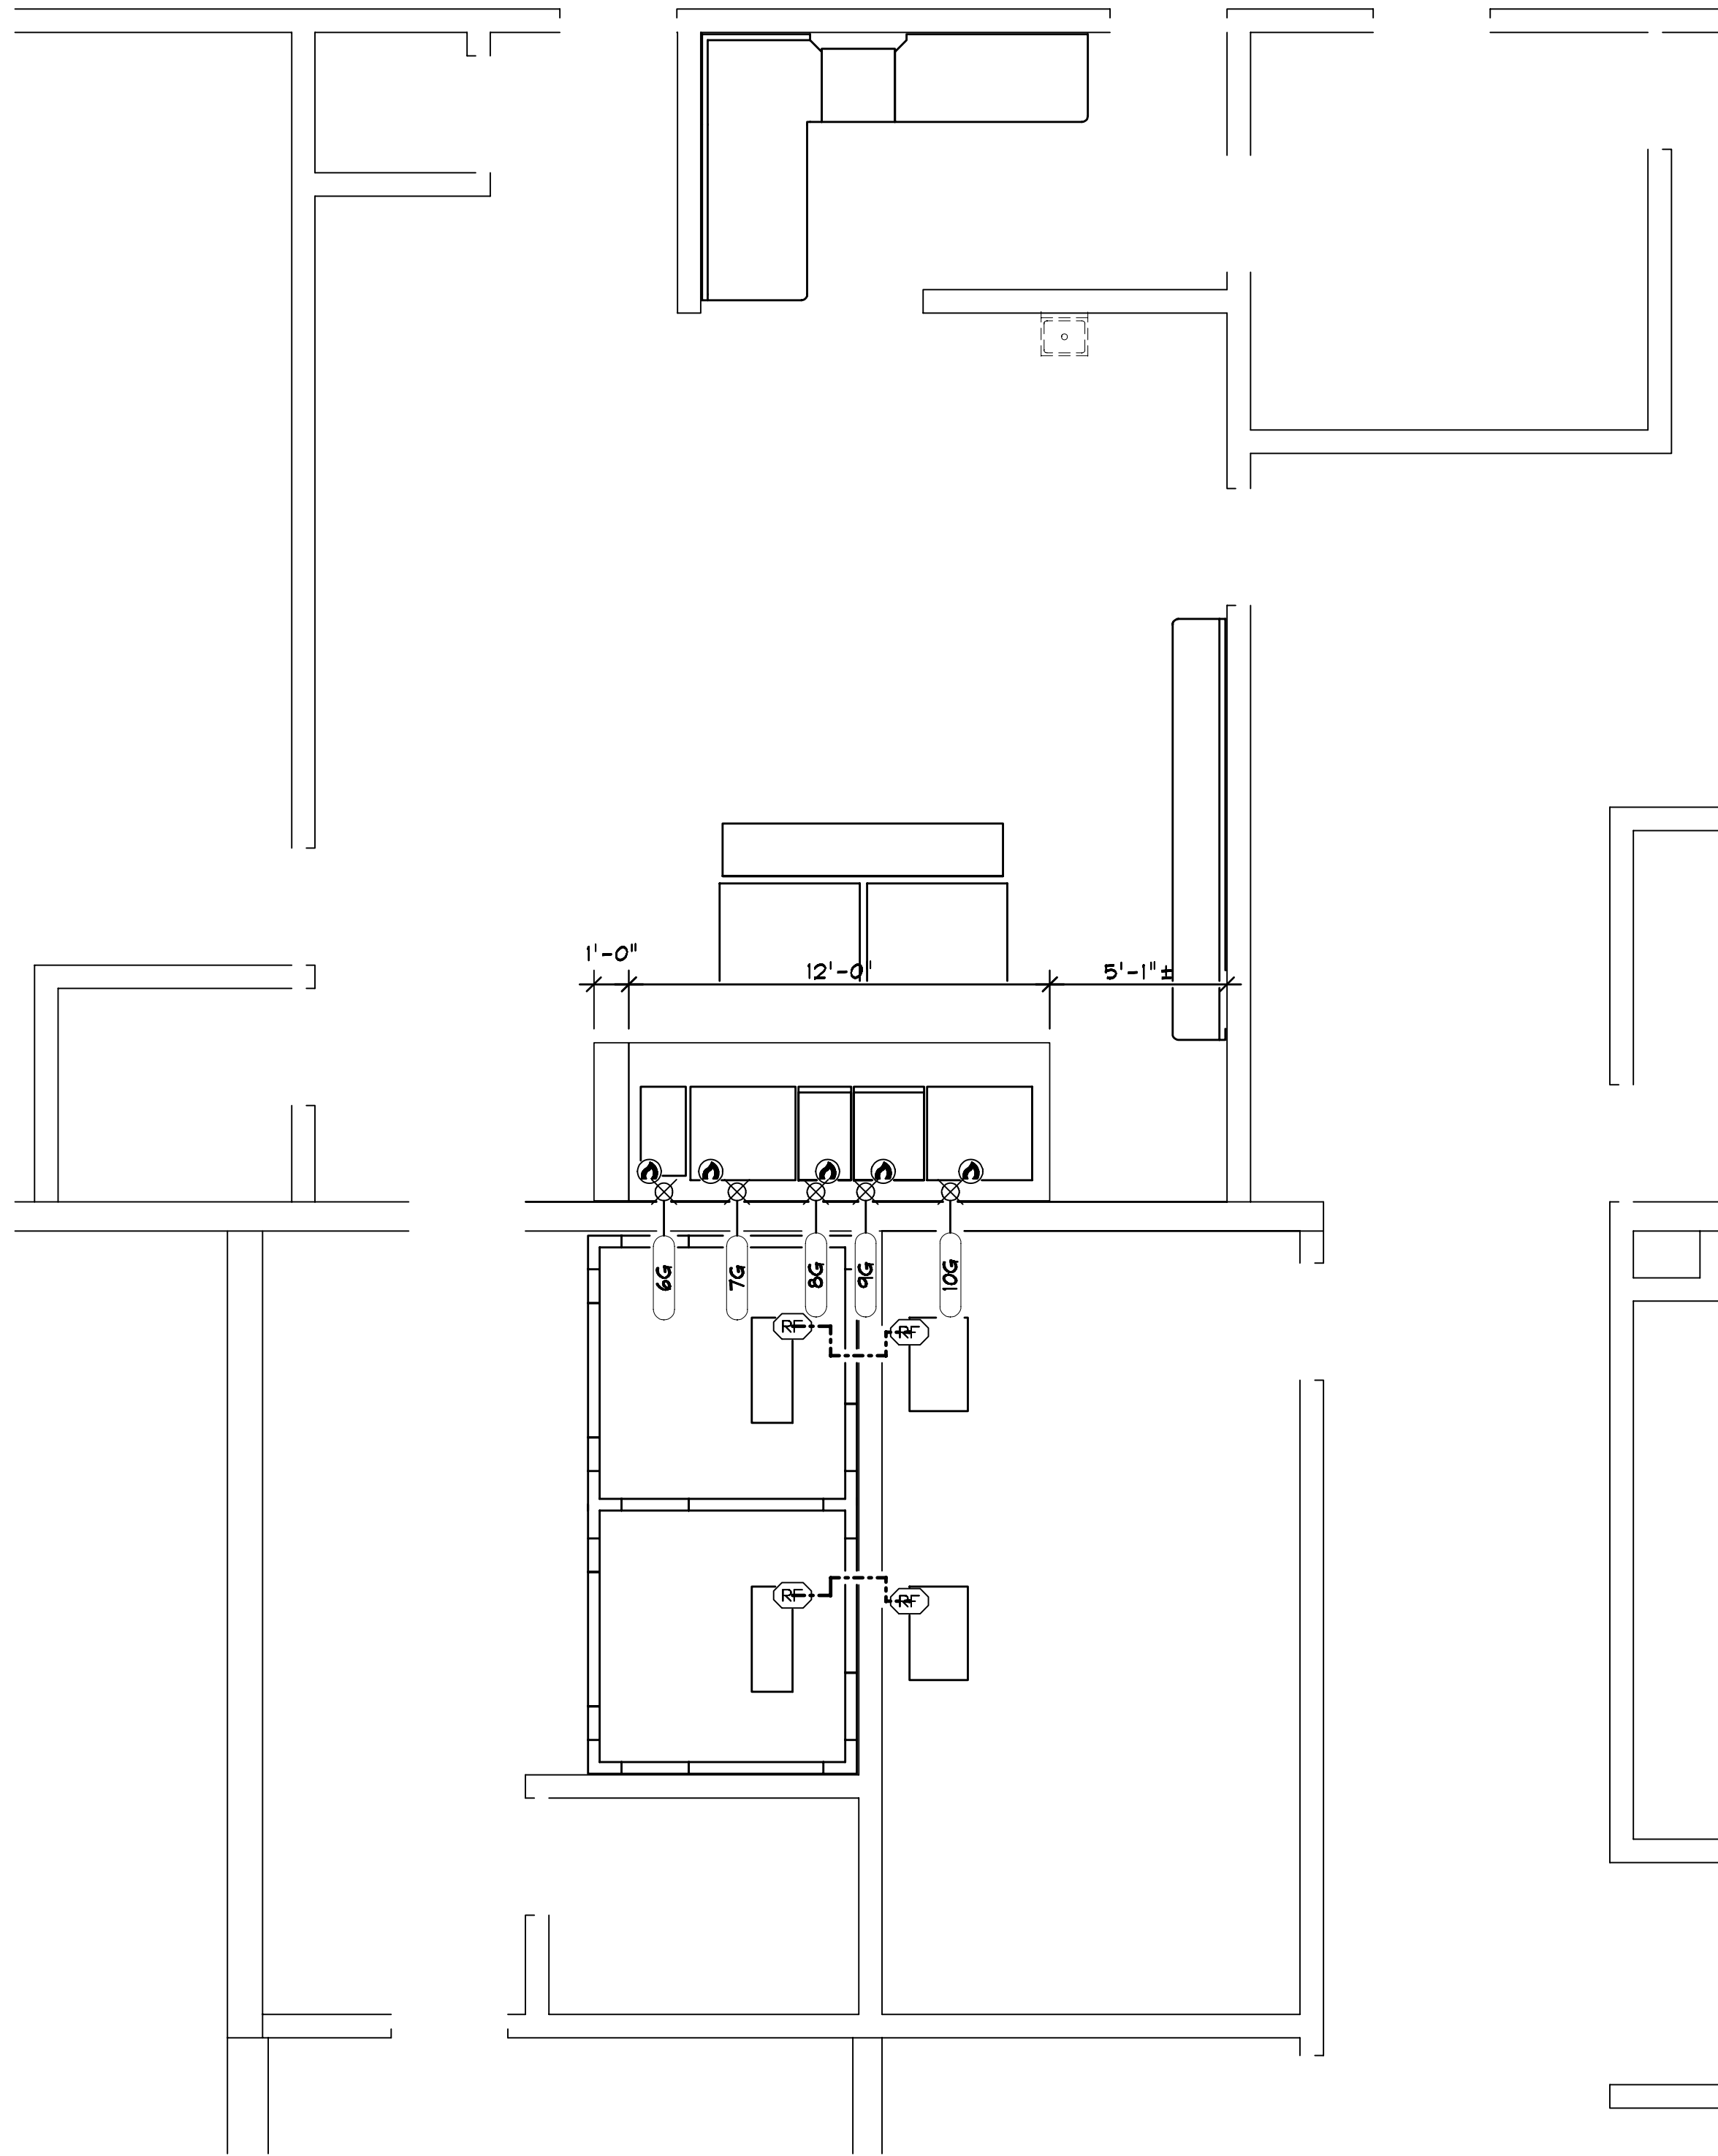

GAS SYMBOL SCHEDULE	
FIELD CONNECTIONS BY RESPECTIVE TRADES	
AF - ABOVE FLOOR	
AFF - ABOVE FINISHED FLOOR	
RI - ROUGH IN	
⊕ - ROUGH IN POINT	
⊙ - CONNECTION POINT	

G A S

1 \ 4" = 1' - 0"

CONTENTS	
K1	LAYOUT
K2	ISOMETRICS
K3	SCHEDULES
K4	ELECTRICAL
K5	PLUMBING
K6	VENTILATION
K7	MECHANICAL

SCALE:
AS NOTED
DATE: 06/17/2021
DRAWN BY: DDB
NS-WLK

K7

OF 7

99 WALKER STREET
KITCHEN

REVISIONS	
No.	Date
1	06/17/2021
2	06/17/2021
3	06/17/2021
4	06/17/2021
5	06/17/2021
6	06/17/2021
7	06/17/2021
8	06/17/2021
9	06/17/2021
10	06/17/2021
11	06/17/2021
12	06/17/2021
13	06/17/2021
14	06/17/2021
15	06/17/2021
16	06/17/2021
17	06/17/2021
18	06/17/2021
19	06/17/2021
20	06/17/2021
21	06/17/2021
22	06/17/2021
23	06/17/2021
24	06/17/2021
25	06/17/2021
26	06/17/2021
27	06/17/2021
28	06/17/2021
29	06/17/2021
30	06/17/2021
31	06/17/2021
32	06/17/2021
33	06/17/2021
34	06/17/2021
35	06/17/2021
36	06/17/2021
37	06/17/2021
38	06/17/2021
39	06/17/2021
40	06/17/2021
41	06/17/2021
42	06/17/2021
43	06/17/2021
44	06/17/2021
45	06/17/2021
46	06/17/2021
47	06/17/2021
48	06/17/2021
49	06/17/2021
50	06/17/2021
51	06/17/2021
52	06/17/2021
53	06/17/2021
54	06/17/2021
55	06/17/2021
56	06/17/2021
57	06/17/2021
58	06/17/2021
59	06/17/2021
60	06/17/2021
61	06/17/2021
62	06/17/2021
63	06/17/2021
64	06/17/2021
65	06/17/2021
66	06/17/2021
67	06/17/2021
68	06/17/2021
69	06/17/2021
70	06/17/2021
71	06/17/2021
72	06/17/2021
73	06/17/2021
74	06/17/2021
75	06/17/2021
76	06/17/2021
77	06/17/2021
78	06/17/2021
79	06/17/2021
80	06/17/2021
81	06/17/2021
82	06/17/2021
83	06/17/2021
84	06/17/2021
85	06/17/2021
86	06/17/2021
87	06/17/2021
88	06/17/2021
89	06/17/2021
90	06/17/2021
91	06/17/2021
92	06/17/2021
93	06/17/2021
94	06/17/2021
95	06/17/2021
96	06/17/2021
97	06/17/2021
98	06/17/2021
99	06/17/2021
100	06/17/2021