
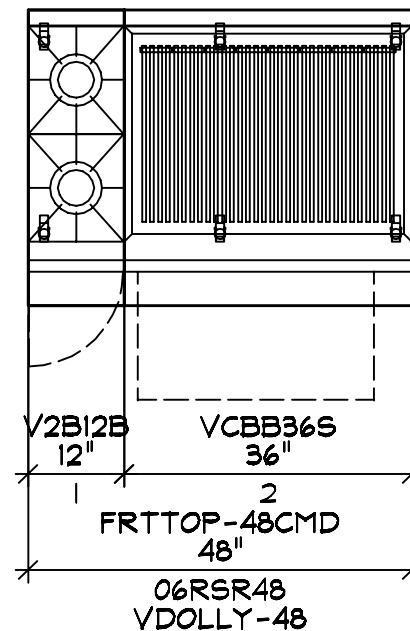


CONNECTIONS

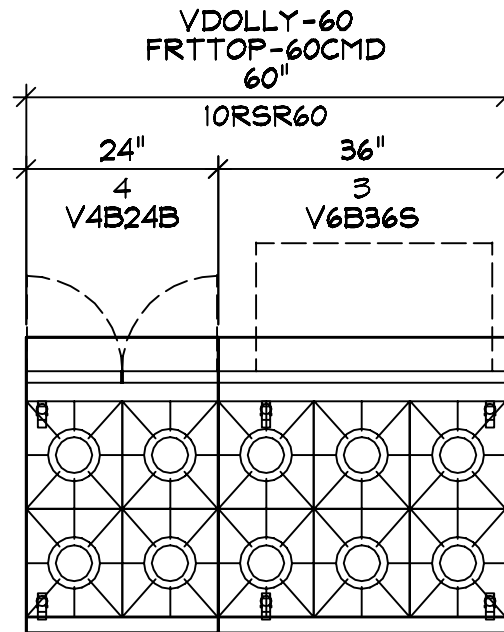

VH-CWOLF
COPYRIGHT (C) 2020


VULCAN

ROXANNE HOLT

CINDY WOLF


10-10-20

CONNECTIONS

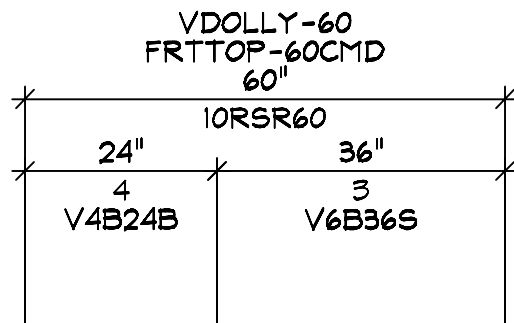


3	1 EA	V6B36S	RANGE
260	MBTU	1.25	32 AFF

4	1 EA	V4B24B	RANGE
140	MBTU	1.25	MANIFOLD

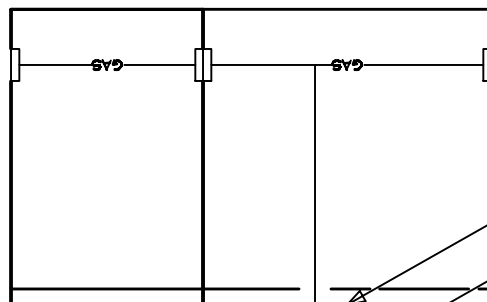

G2

G1

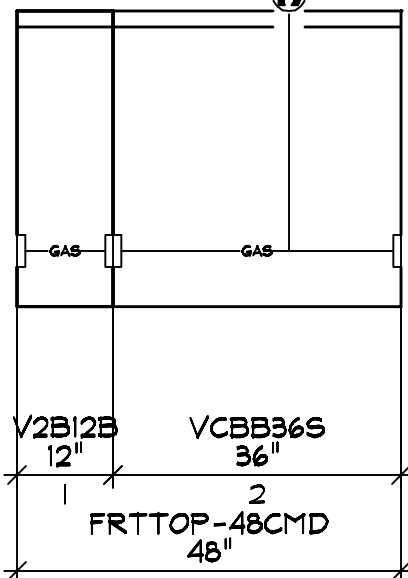

1	1 EA	V2B12B	RANGE
70	MBTU	1.25	MANIFOLD

2	1 EA	VCBB36S	CHAR BROILER
149	MBTU	1.25	32 AFF




VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

ELEVATION

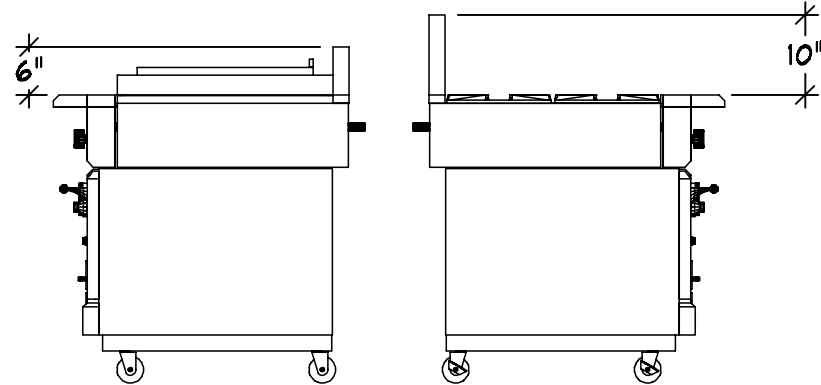


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

ELEVATION

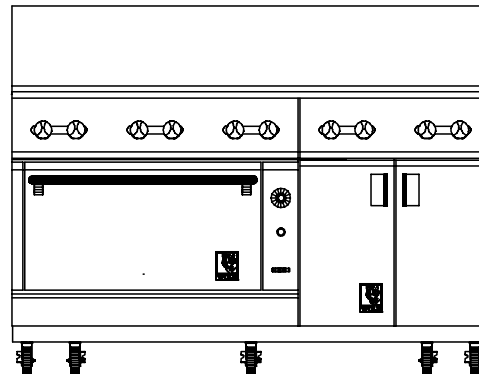


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

ELEVATION

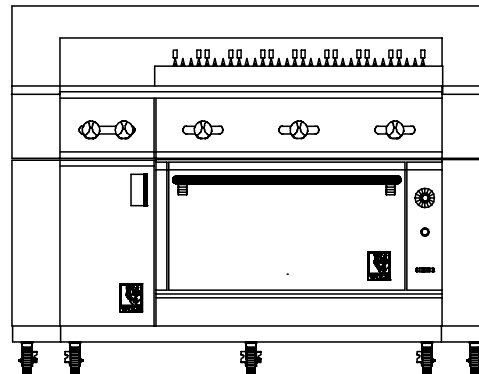


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

ELEVATION

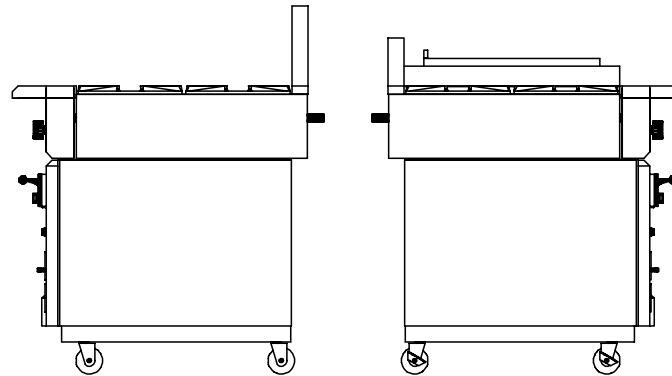

VH-CWOLF
COPYRIGHT (C) 2020


VULCAN

ROXANNE HOLT

CINDY WOLF

10-10-20

NE VIEW

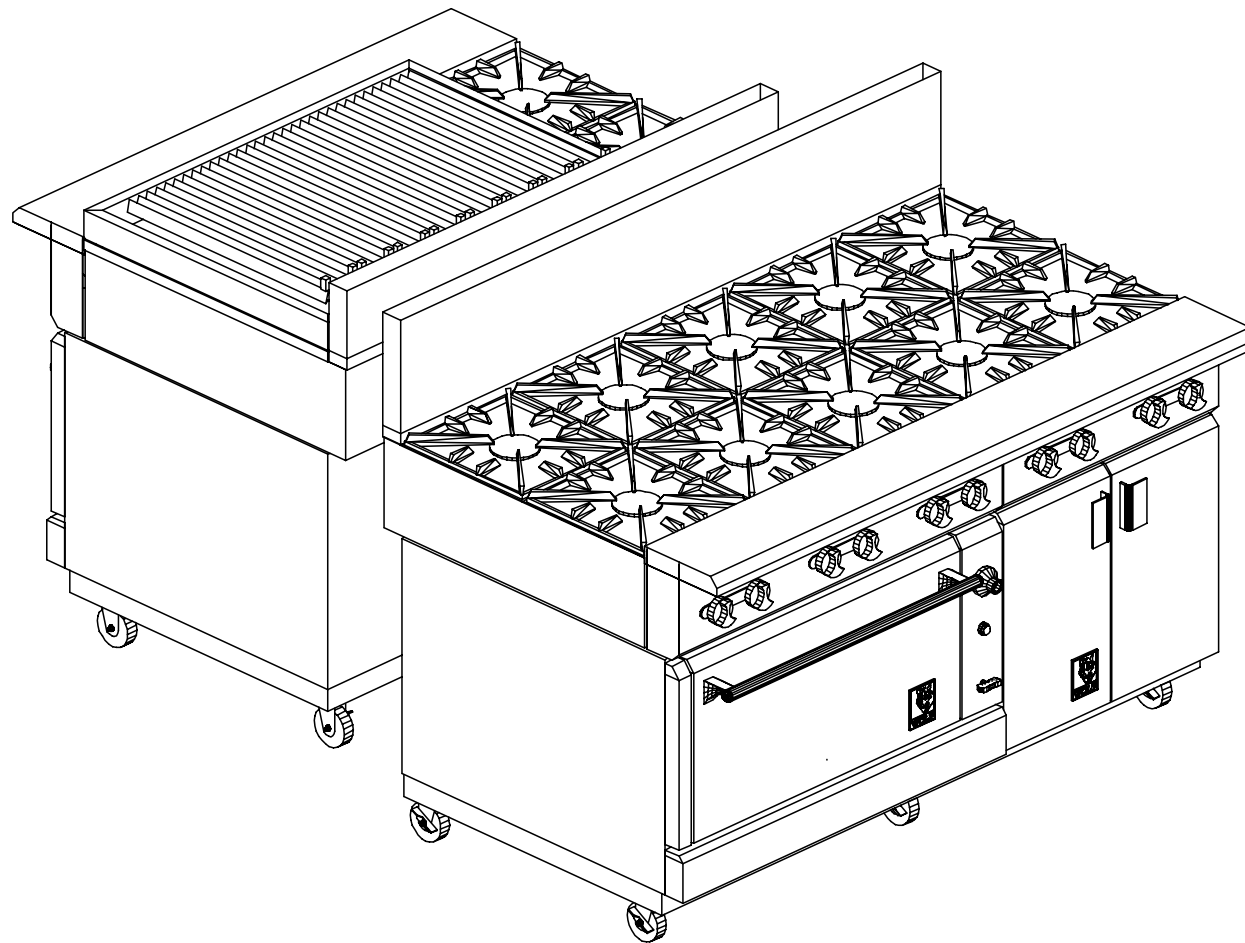


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

NNW VIEW

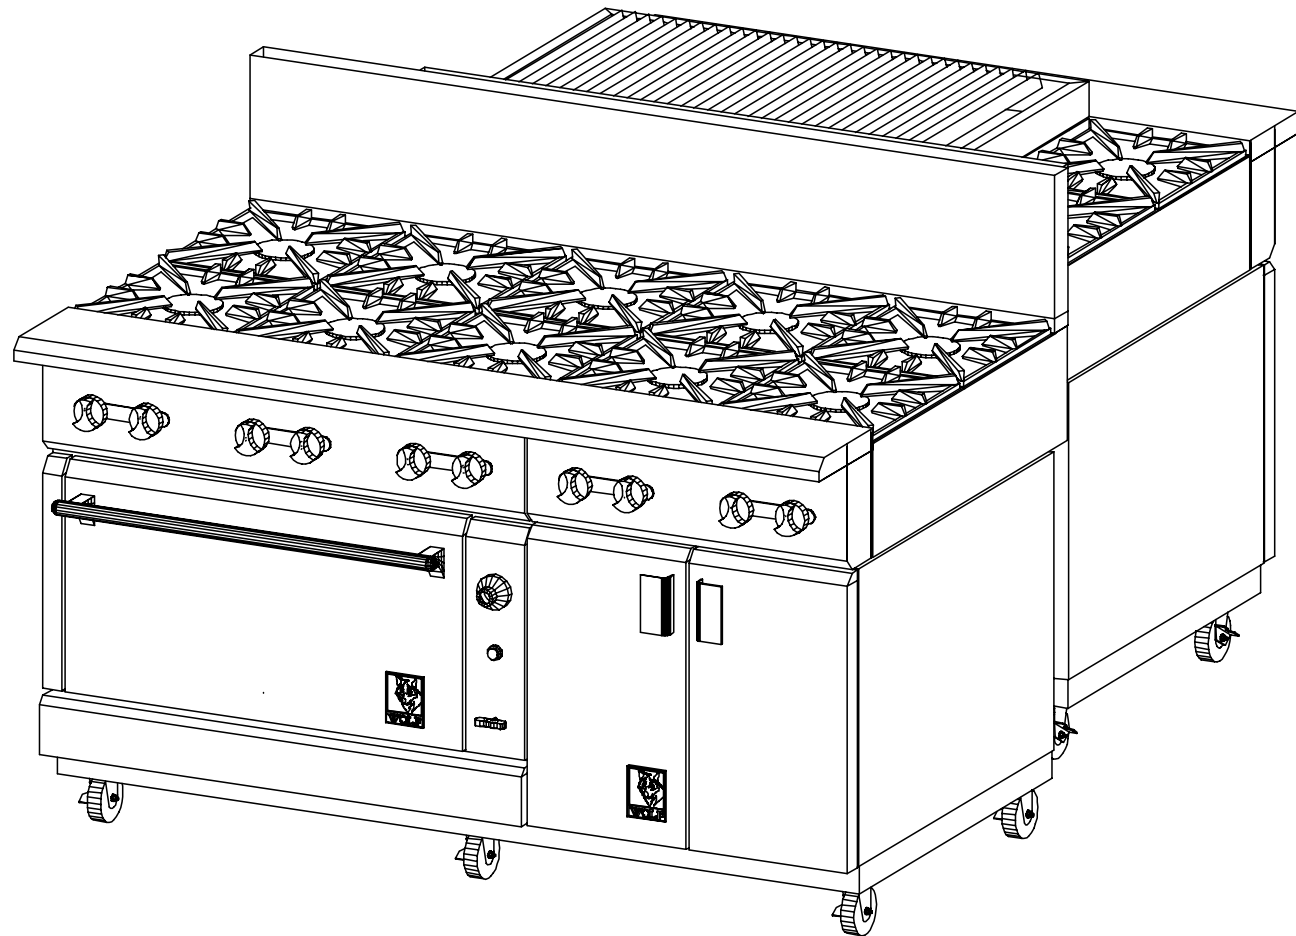


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

SEE VIEW

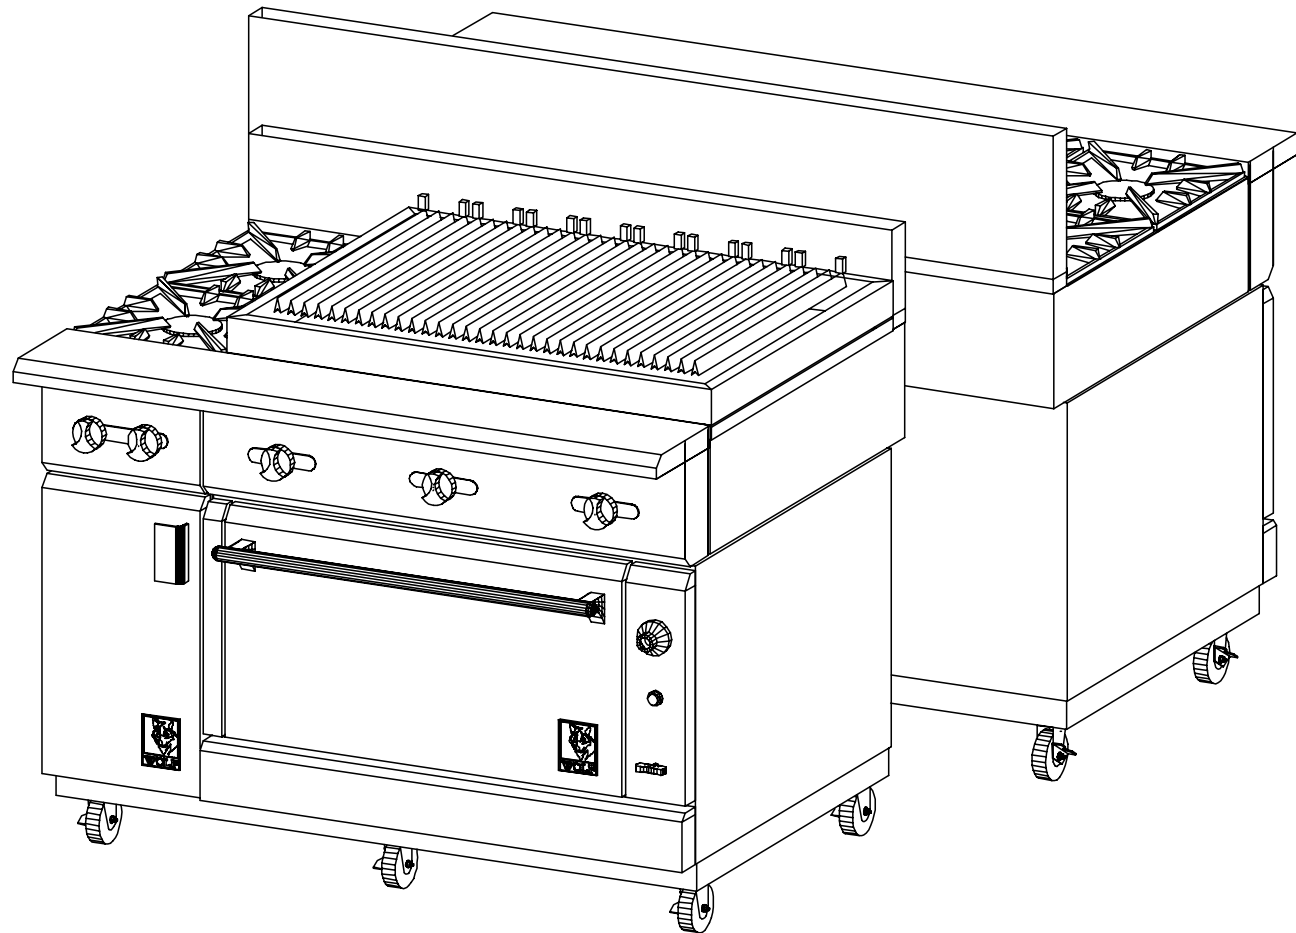


VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

SW VIEW

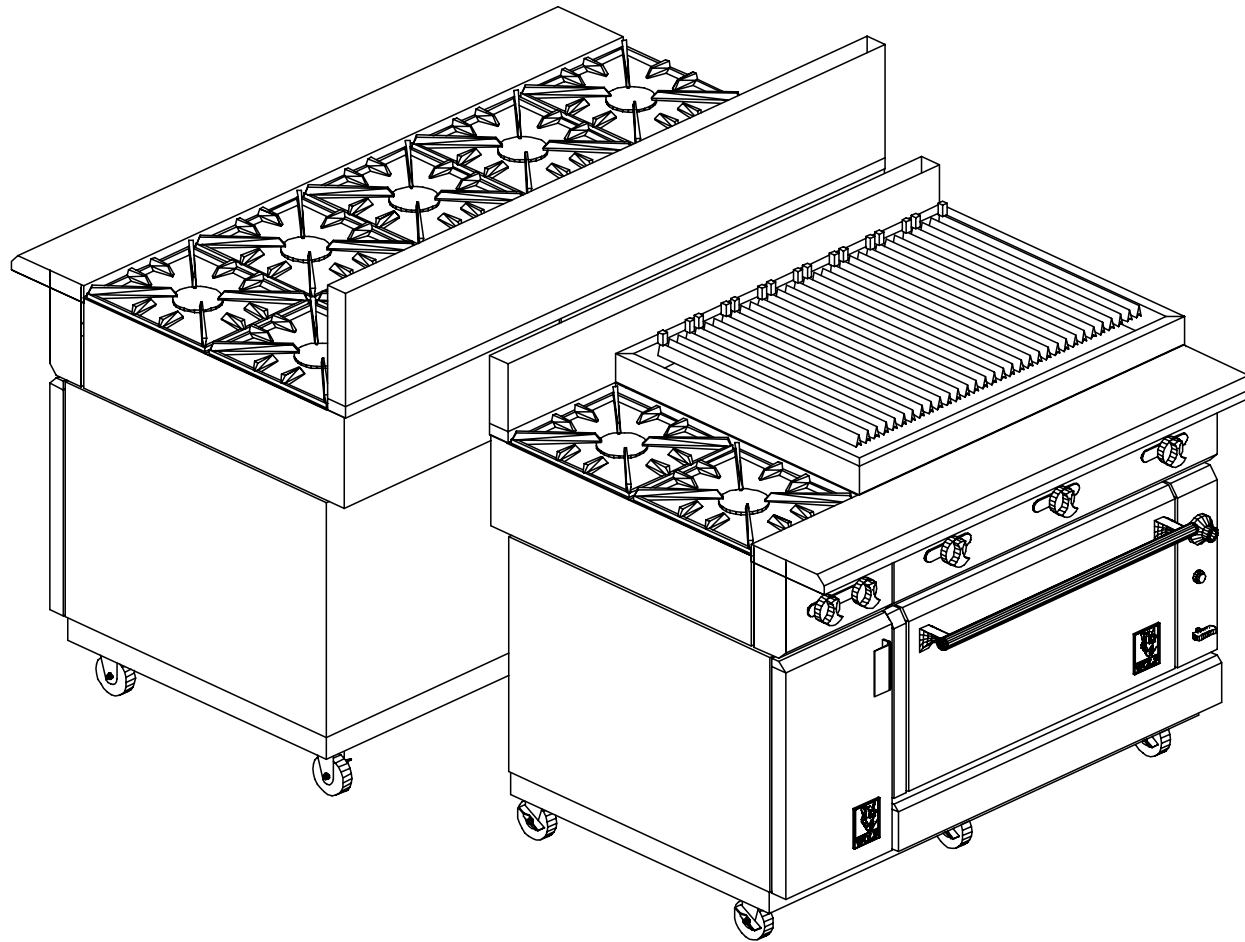

VH-CWOLF
COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF
10-10-20

GENERAL NOTES - PLEASE READ

VENTILATION:

ALL COOKING EQUIPMENT MUST BE VENTILATED BY AN APPROVED APPLIANCE IN ACCORDANCE WITH ALL APPLICABLE CODES.

FIRE SUPPRESSION:

ALL COOKING EQUIPMENT MUST BE PROTECTED BY AN APPROVED FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES.

CONNECTIONS:

ALL PIPING, FITTINGS, AND INTERCONNECTION SERVICES SHOWN ARE TO BE SUPPLIED AND INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES.

GAS CONNECTIONS:



















EXTERNAL GAS REGULATORS, FLEXIBLE GAS LINES AND RESTRAINING CABLES PROVIDED WITH THE EQUIPMENT MUST BE INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES. INCOMING GAS MANIFOLD SUPPLY PRESSURE MUST NOT EXCEED 0.5 PSI (14" W.C.)

BY OTHERS:

VERIFY ALL EQUIPMENT LISTED AS BY OTHERS FOR SIZE AND MECHANICAL SERVICE REQUIREMENTS.

NOTE:

IN LINE WITH THE POLICY TO CONTINUALLY IMPROVE ITS PRODUCTS, THE MANUFACTURER RESERVE THE RIGHT TO CHANGE MATERIALS AND SPECIFICATIONS WITHOUT NOTICE.

	CONNECTION POINT
	COLD WATER
	HOT WATER
	HOT + COLD WATER
	DRAIN
	POWER
	SWITCH
	CORD SET
	CONV OUTLET RECP
	DUPLEX RECPTACLE
	SINGLE RECPTACLE
	GAS
	STEAM SUPPLY
	STEAM RETURN
	STEAM TAKE OFF
	EXHAUST VENT
	SUPPLY VENT
	REFRIGERATION

10-09-2020

10-09-2020 : 08:21:03a

10-10-2020 : 07:20:21a

10-10-2020 : 07:45:54a

10-10-2020 : 07:46:44a

PROJECT CODE

CWOLF



VH - CWOLF

COPYRIGHT (C) 2020

VULCAN

ROXANNE HOLT

CINDY WOLF

10-10-20