




WULG/AN)

T @ @ @ @ @ @

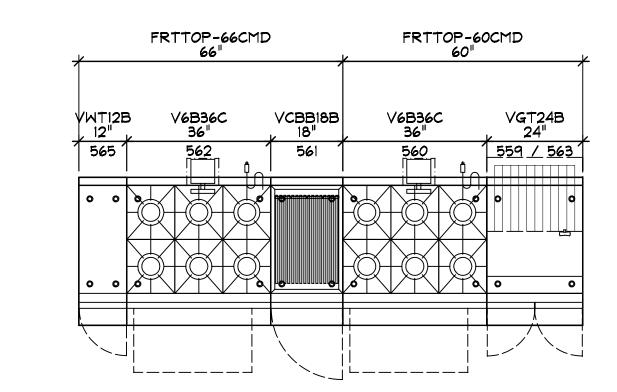



∞ =∞	Ø = Ø	Ø = Ø	∞ ∞	∞	⊗ = ⊗	∞	8	8
1		•				•		
		o' 	1771 TEXT		Na Marion	o' 		w .car

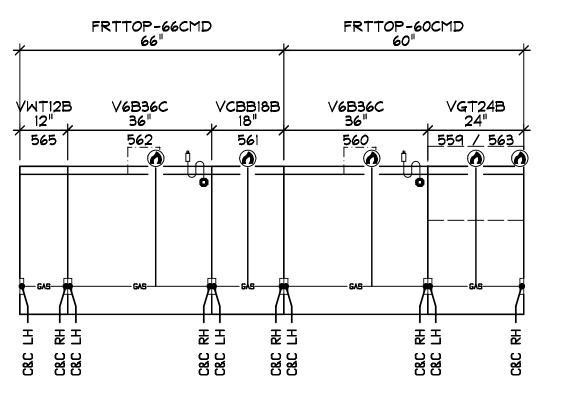

559 1 EA VGT24B	GRIDDLE	
6Ø MBTU 1.25	32 AFF	
56Ø 1 EA V6B36C	RANGE	
	32 AFF	
	5-15	
561 1 EA VCBB18B	CHARBROILER	
♠ 49 MBTU Ø.75	32 AFF	
562 1 EA V6B36C	RANGE	
242 MBTU 1.25	32 AFF	
3 120(1) 4.0A	5-15	
563 1 EA VICM24	SALAMANDER	
		78 AFF
565 1 EA VWT12B	SPREADER	

GENERAL NOTES - PLEASE READ

VENTILATION: ALL COOKING EQUIPMENT MUST BE VENTILATED BY AN APPROVED APPLIANCE IN ACCORDANCE WITH ALL APPLICABLE CODES.

FIRE SUPPRIESSION: ALL COOKING EQUIPMENT MUST BE PROTECTED BY AN APPROVED FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES.

CONNECTIONS:
ALL PIPING, FITTINGS, AND INTERCONNECTION SERVICES SHOWN ARE TO BE SUPPLIED AND INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES.

GAS CONNECTIONS:

GAS CONNECTIONS:
EXTERNAL GAS REGULATORS, FLEXIBLE GAS LINES AND RESTRAINING CABLES PROVIDED
WITH THE EQUIPMENT MUST BE INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE
WITH ALL LOCAL CODES. INCOMING GAS MANIFOLD SUPPLY PRESSURE MUST
NOT EXCEED 0.5 PSI (14" W.C.)

BY OTHERS: VERIFY ALL EQUIPMENT LISTED AS BY OTHERS FOR SIZE AND MECHANICAL SERVICE REQUIREMENTS.

NOTE: IN LINE WITH THE POLICY TO CONTINUALLY IMPROVE ITS PRODUCTS, THE MANUFACTURES RESERVE THE RIGHT TO CHANGE MATERIALS AND SPECIFICATIONS WITHOUT NOTICE.

10-15-2020

#	CONNECTION	POINT
\triangle	COLD WATER	

© COLD WATER

H HOT WATER

HRC WATER

D DRAIN

POWER

SWITCH

CORD SET

CORD OUTLET R

© CONV OUTLET RECP
DUPLEX RECPTACLE
SINGLE RECPTACLE
GAS

GAS
(SS) STEAM SUPPLY
(CR) STEAM RETURN
(ST) STEAM TAKE OFF

ST STEAM TAKE OFF

VE EXHAUST VENT

VS SUPPLY VENT

RF REFRIGERATION

PROJECT CODE

VULCAN HART COMPANY BALTIMORE, MARYLAND

AS NOTED

DATE: 10/15/2020

DRAWN BY: DDB

VH-HBLVD

913 WEST S ANNAPOLIS,

DESIGN