



155	5 1	EΑ	36IRB	SALAMANDER	V48XX
<b>()</b>	30	MBT	U Ø.75		INTERPLUMB
15E	5 1	EΑ	TGRD48	GRIDDLE	
	120	MBT	U 1.25	32 AFF	
157	1	EΑ	VSC72-MOD	REFRIGERATED	BASE
<u> </u>	1	.20 (	(1) Б.7А	5-15	
_					
158	3 1	EΑ	VCBB36	CHRABROILER	
<u>a</u>	99	MBT	U 1.25	MANIFOLD	
_					

GAS CONNECTION #: 1
LOCATED IN ITEM: 156
PIPE SIZE: 1.25 NPT
CP HEIGHT: 32" AFF
TOTAL GAS LOAD: 285 MBTU
INCLUDES ITEMS: 158 156 155
NOTE:

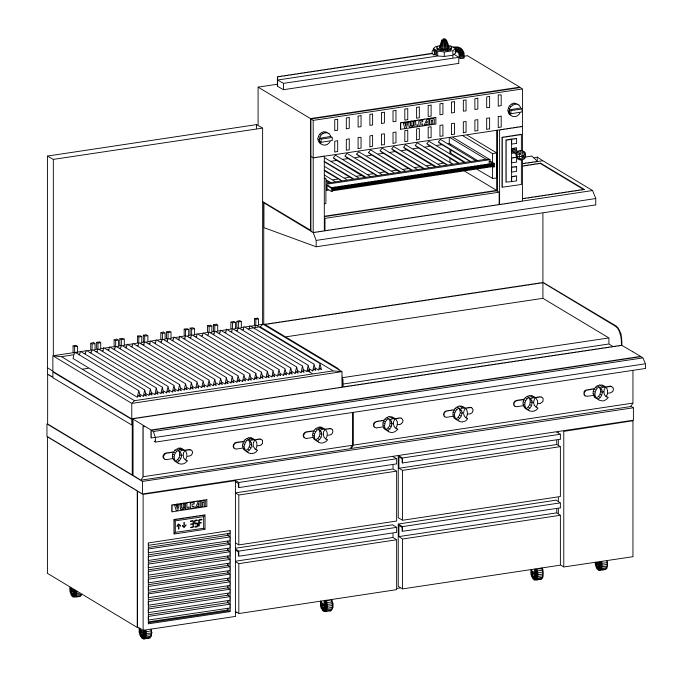

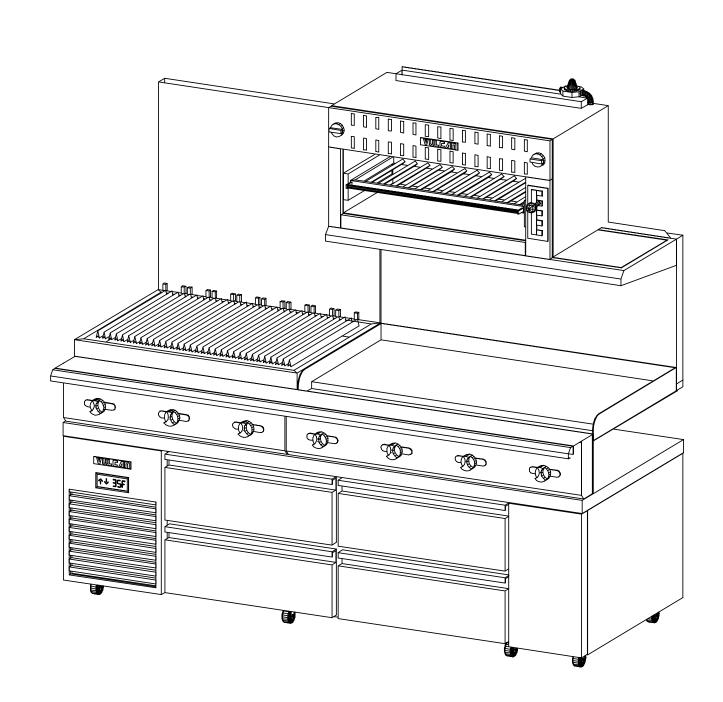

## GENERAL NOTES - PLEASE READ

VENTILATION: ALL COOKING EQUIPMENT MUST BE VENTILATED BY AN APPROVED APPLIANCE IN ACCORDANCE WITH ALL APPLICABLE CODES.

FIRE SUPPRIESSION: ALL COOKING EQUIPMENT MUST BE PROTECTED BY AN APPROVED FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES.

CONNECTIONS:
ALL PIPING, FITTINGS, AND INTERCONNECTION SERVICES SHOWN ARE TO BE SUPPLIED AND INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES.

GAS CONNECTIONS:

GAS CONNECTIONS:
EXTERNAL GAS REGULATORS, FLEXIBLE GAS LINES AND RESTRAINING CABLES PROVIDED WITH THE EQUIPMENT MUST BE INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES. INCOMING GAS MANIFOLD SUPPLY PRESSURE MUST NOT EXCEED 0.5 PSI (14" W.C.)

BY OTHERS: VERIFY ALL EQUIPMENT LISTED AS BY OTHERS FOR SIZE AND MECHANICAL SERVICE REQUIREMENTS.

NOTE: IN LINE WITH THE POLICY TO CONTINUALLY IMPROVE ITS PRODUCTS, THE MANUFACTURES RESERVE THE RIGHT TO CHANGE MATERIALS AND SPECIFICATIONS WITHOUT NOTICE.

	1	
		CONNECTION POINT
		C COLD WATER
		H HOT WATER
		HEC WATER
		D DRAIN
		POWER
		\$\_SWITCH
		CORD SET
_		C≠ CONV OUTLET RECF
=		→ DUPLEX RECPTACLE
		SINGLE RECPTACLE
		(SS) STEAM SUPPLY
		CR STEAM RETURN
		ST STEAM TAKE OFF
5		VE EXHAUST VENT
		VS SUPPLY VENT
		RF REFRIGERATION

PROJECT CODE

VULCAN HART COMPANY

SCALE:

\_\_\_\_AS NOTED

DATE: \_\_02.20/2022

DRAWN BY: \_\_DDB

VH\_MAVB2

NEXT STEP DESIGN

1

N

913 WEST S ANNAPOLIS,